



Features

- · Plastic housing with class II design
- · Built-in active PFC function
- Standby power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- Function options: 3 in 1 dimming (dim-to-off);
 Auxiliary DC output
- Typical lifetime >50000hours
- 5 years warranty


Applications

- LED panel lighting
- · LED downlight
- · LED decorative lighting
- Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location

Description

NPF-120D series is a 120W AC/DC LED driver featuring the constant current mode output. NPF-120D operates from $90\sim305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-120D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

Model Encoding

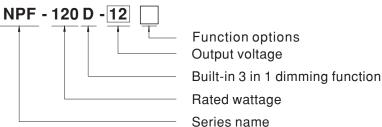

Type	IP Level	Function	Note
Blank	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
BE	IP67	3 in 1 dimming function and Auxiliary DC output	In Stock



SPECIFICATION


MODEL			NPF-120D-12	NPF-120D-15	NPF-120D-20	NPF-120D-24	NPF-120D-30	NPF-120D-36	NPF-120D-42	NPF-120D-48	NPF-120D-54
	RATED CURF	RENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A
	RATED POWE	ĒR	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W
ОИТРИТ	CONSTANT CURRENT REGION		7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54
	CURRENT RIPPLE		5.0% max. @rated current								
	CURRENT TOLERANCE		±5.0%								
	AUXILIARY DC OUTPUT Note.4		Nominal 12V(deviation 11.4~12.6V)@0.2A for BE-Type only								
	SET UP TIME Note.3		500ms/115VAC, 230VAC								
INPUT	VOLTAGE RANGE Note.2		90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE		47 ~ 63Hz								
	POWER FACTOR (Typ.)		PF ≥ 0.97/115VAC, PF ≥ 0.96/230VAC, PF ≥ 0.94/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIC DISTORTION		THD< 20%(@load≧60%/115VC, 230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)								
	EFFICIENCY	BLANK-TYPE	87.5%	88%	89%	89.5%	89%	89.5%	89.5%	90%	90%
	/ 	BE-TYPE(Note.5)	87.5%	87.5%	88.5%	89%	88.5%	89%	89%	89%	89%
	AC CURRENT	Г (Тур.)	1.3A / 115V	AC 0.65	5A / 230VAC	0.55A/	277VAC				
	INRUSH CURRENT(Typ.)		COLD START60A(twidth=520µs measured at 50% lpeak) at 230VAC; Per NEMA 410								
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER		4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT		<0.25mA / 277VAC								
	STANDBY POWER CONSUMPTION		<0.5W								
PROTECTION -	OVER CURRENT		95 ~ 108%								
			Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT		Hiccup mode, recovers automatically after fault condition is removed								
	OVED VOLTACE		15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V
	OVER VOLIA	OVER VOLTAGE		o/p voltage, r	e-power on to	recover					
OVER TEMPERATURE		Shut down o/p voltage, re-power on to recover									
	WORKING TEMP.		Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
ENVIRONMENT	MAX. CASE TEMP.		Tcase=+90°C								
	WORKING HUMIDITY		20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY		-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT		$\pm 0.03\%$ C (0 ~ 40°C)								
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
EMC	SAFETY STA	NDARDS	UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 independent, EAC TP TC 004 IP67 approved; Design refer to EN60335-1								
	WITHSTAND VOLTAGE		I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION		Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%); EN61000-3-3; EAC TP TC 020								
	EMC IMMUNITY		Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity Line-Line 2KV); EAC TP TC 020								
	MTBF		877.8K hrs min. Telcordia SR-332 (Bellcore); 233.9K hrs min. MIL-HDBK-217F (25°C)								
	DIMENSION		191*63*37.5mm (L*W*H)								
OTHERS	DIMENSION		0.97Kg; 15pcs/15.6Kg/0.87CUFT								
OTHERS	PACKING			•	,						

- 3. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 4. The Auxiliary DC output is defined between AUX+ and DIM-.
- 5. The efficiency for BE-Type is measured when the Auxiliary DC output is 100% loaded at 12V, 0.2A.
- 6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 7. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details.
- 8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C or less.
- 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com




■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

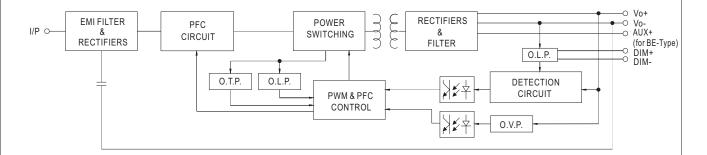

■ DRIVING METHODS OF LED MODULE

* This series works in constant current mode to directly drive the LEDs.



Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

please refer to Mechanical Specification




■ DIMMING OPERATION




3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM: 0 ~ 10VDC, or 10V PWM signal or resistance.
- \cdot Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 0 ~ 10VDC




"DO NOT connect "DIM- to Vo-"


O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to Vo-"

O Applying additive resistance:










Note : 1. Min. dimming level is about 6% and the output current is not defined when 0% I out <6%.


- 2. The output current could drop down to 0% when dimming input is about $0k\Omega$ or 0Vdc, or 10V PWM signal with 0% duty cycle.
- Auxiliary DC operation (for BE-type)
- AUX+, with mark ***, is added for BE-Type, used as the Auxiliary DC output with respect to DIM-.



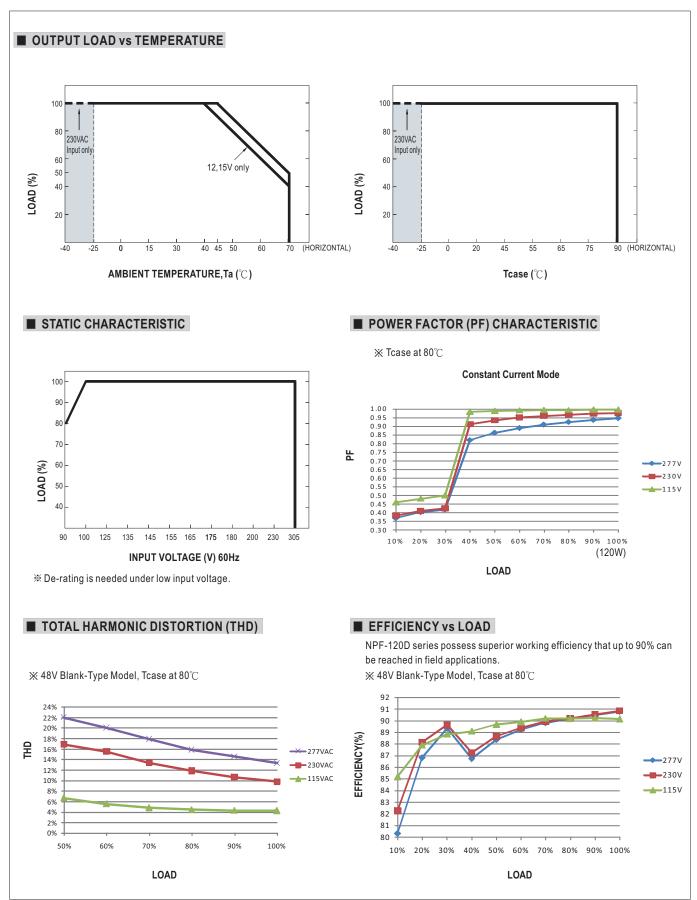



■ LIFE TIME

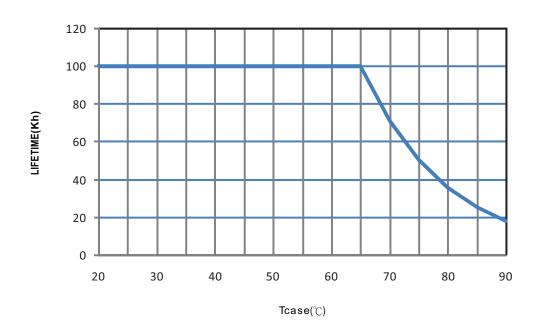




■ MECHANICAL SPECIFICATION

Case No. PWM-120


Unit:mm

※ Blank-Type

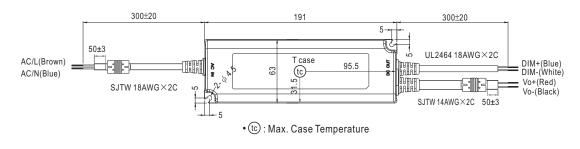



※ BE-Type

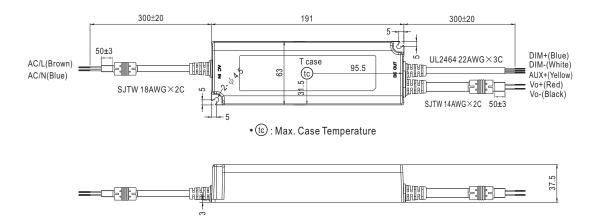

■ INSTALLATION MANUAL

Please refer to:http://www.meanwell.com/manual.html