







■ Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty


■ Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HLG-60H series is a 60W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-60H operates from $90 \sim 305$ VAC and offers models with different rated voltage ranging between 15V and 54V. Thanks to the high efficiency up to 90.5%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-60H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

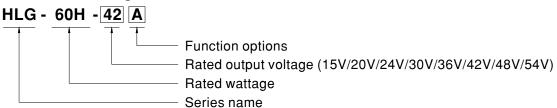

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request



SPECIFICATION


MODEL		HLG-60H-15	HLG-60H-20	HLG-60H-24	HLG-60H-30	HLG-60H-36	HLG-60H-42	HLG-60H-48	HLG-60H-54[
	DC VOLTAGE	15V	20V	24V	30V	36V	42V	48V	54V
ОИТРИТ	CONSTANT CURRENT REGION Note.4	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	RATED CURRENT	4A	3A	2.5A	2A	1.7A	1.45A	1.3A	1.15A
	RATED POWER	60W	60W	60W	60W	61.2W	60.9W	62.4W	62.1W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	300mVp-p
			A/AB-Type only			P. P.	r r		
	VOLTAGE ADJ. RANGE	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	40 ~ 46V	44 ~ 53V	49 ~ 58V
		Adjustable for A	A/AB-Type only	·		I.			
	CURRENT ADJ. RANGE	2.4 ~ 4A	1.8 ~ 3A	1.5 ~ 2.5A	1.2 ~ 2A	1 ~ 1.7A	0.87 ~ 1.45A	0.78 ~ 1.3A	0.69 ~ 1.15
	VOLTAGE TOLERANCE Note.3		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
		500ms,80ms/1				_ = 0.070		± 0.070	
				5,001115/230VAC	'				
	HOLD UP TIME (Typ.)	16ms / 115VAC, 230VAC							
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Places refer to "STATIC CHARACTERISTIC" agostion)							
		(Please refer to "STATIC CHARACTERISTIC" section)							
	FREQUENCY RANGE	47 ~ 63Hz							
INPUT	POWER FACTOR (Typ.)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC @ full load							
	(717	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)							
	TOTAL HARMONIC DISTORTION	THD<20% (@ load≥60% / 115VAC,230VAC; @ load≥75% / 277VAC)							
	TO THE TIPE AND THE PROPERTY OF THE PROPERTY O	(Please refer to	"TOTAL HARM	ONIC DISTOR	TION (THD)" sed	ction)			
	EFFICIENCY (Typ.)	87.5%	89%	89.5%	90%	90%	90%	90.5%	90.5%
	AC CURRENT (Typ.)	0.64A / 115VAC	0.32A / 23	0VAC 0.3A	/ 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 5	5A(twidth=265μs r	measured at 50%	Ipeak) at 230VAC	; Per NEMA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC							
	LEAKAGE CURRENT	<0.75mA/277VAC							
	OVER CURRENT Note.4	95 ~ 108%							
		Constant current limiting, recovers automatically after fault condition is removed							
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed							
ROTECTION		18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 65V	59 ~ 68V
	OVER VOLTAGE				100	1		1	100
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover Shut down o/p voltage, re-power on to recover							
					LOAD vs TEMP	EDATURE" cont	ion)		
	WORKING TEMP.		ou C (Please le	ier to OutPut	LUAD VS TEMP	ERATURE SECT	1011)		
	MAX. CASE TEMP.	Tcase=+80°C							
NVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH no							
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)							
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes							
	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08, EN/AS/NZS 61347-1,EN/AS/NZS 61347-2-13 independent, GB19510.1,GB19510.14,EAC TP TC 00							
SAFETY &	WITHSTAND VOLTAGE	IP65 or IP67 approved ;optional models for J61347-1, J61347-2-13; design refer to UL60950-1, TUV EN60950-1, EN60335-1 I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH							
MC	ISOLATION RESISTANCE								
	EMC EMISSION Note.8		-		(@ load ≥ 60%)		R17743 and GR	17625 1 FAC T	P TC 020
	EMC IMMUNITY				17, light industry le				
	MTBF	1132K hrs min.		-332 (Bellcore);		MIL-HDBK-217F	_	v, LIIIG-LIIIG ZIVV)	, =====================================
H		171*61.5*36.8n		-552 (BellCOIE);	JJON IIIS IIIIII.	WIL-HUDK-ZI/I	(200)		
OTHERS	DIMENSION								
	1 All parameters NOT appoint		15.6Kg/0.9CUFT		tod ourrost as -	0E°C of ambi	tomporeture		
NOTE 1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temper 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47u			•	l canacitor					
		ance: includes set up tolerance, line regulation and load regulation.							
	4. Please refer to "DRIVING METHODS OF LED MODULE".								

- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 70°C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 11. The ambient temperature derating of 3.5° C/1000m with fanless models and of 5° C/1000m with fan models for operating altitude higher than 2000m(6500ft).




■ BLOCK DIAGRAM

Fosc: 100KHz

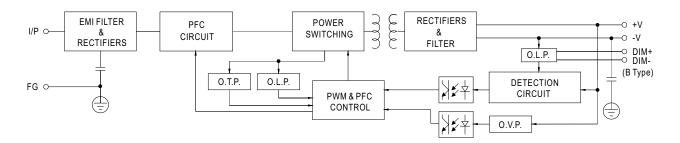

■ DRIVING METHODS OF LED MODULE

※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

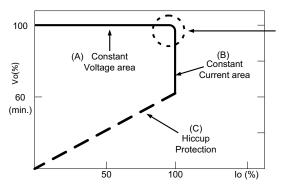


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

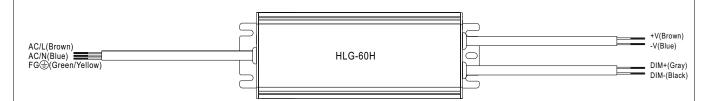


imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- \bigcirc Applying additive 1 ~ 10VDC

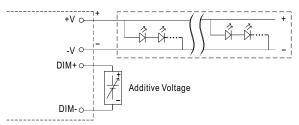


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

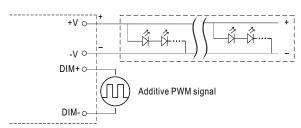



"DO NOT connect "DIM- to -V"


Applying additive resistance:

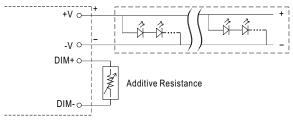

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

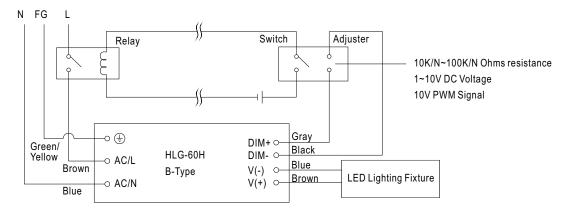


Using a switch and relay can turn ON/OFF the lighting fixture.



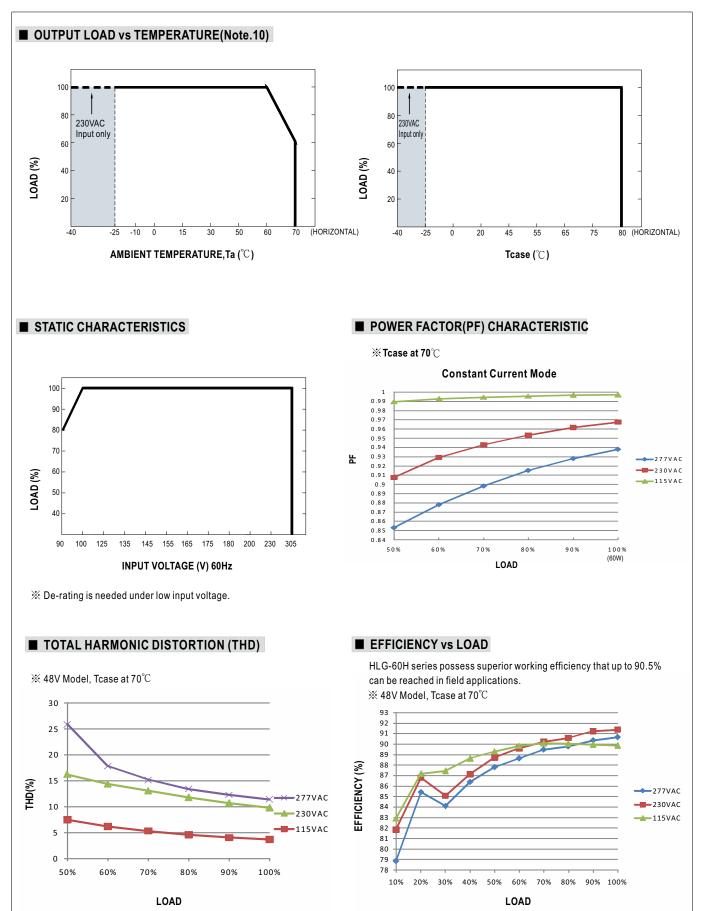





■ LIFETIME

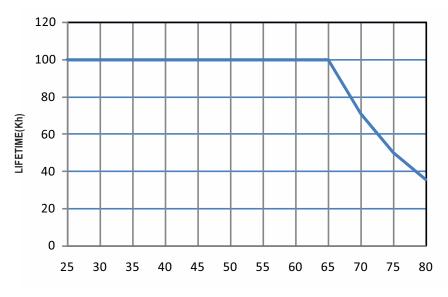



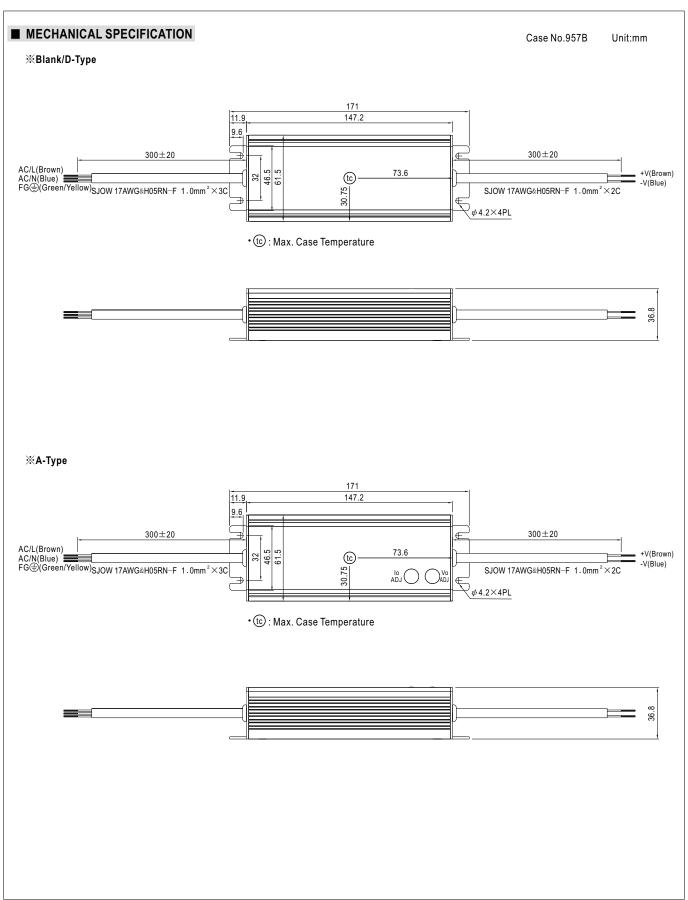



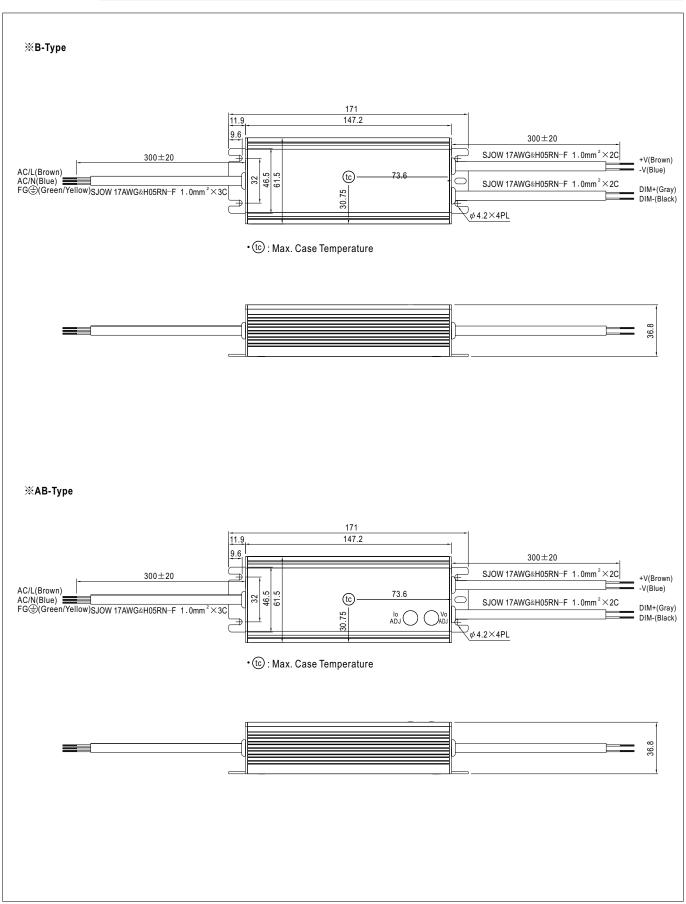




■ WATERPROOF CONNECTION


※ Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-60H to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)				
M12	000	000			
IVIIZ	4-PIN	5-PIN			
	5A/PIN	5A/PIN			
Order No.	M12-04	M12-05			
Suitable Current	10A max.	10A max.			

Size	Pin Configuration (Female)		
M15	(o)		
IVITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		



※ Cable Joiner

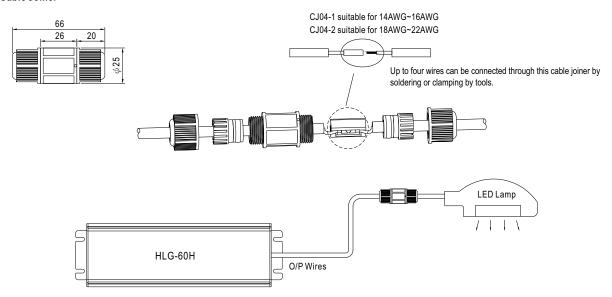

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html