





Features

- · Plastic housing with class II design
- · Built-in active PFC function
- Class 2 power unit (except NPF-90D-12/15)
- Standby power consumption < 0.5W
- IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming (dim-to-off)
- Typical lifetime >50000hours
- 5 years warranty


■ Applications

- · LED panel lighting
- · LED downlight
- LED decorative lighting
- LED tunnel lighting
- · Moving sign

Description

NPF-90D series is a 90W AC/DC LED driver featuring the constant current mode output. NPF-90D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40~+85°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-90D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

■ Model Encoding

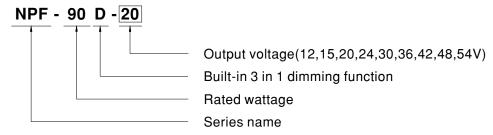




SPECIFICATION

MODEL		NPF-90D-12 🗌	NPF-90D-15 🗌	NPF-90D-20	NPF-90D-24	NPF-90D-30	NPF-90D-36	NPF-90D-42	NPF-90D-48	NPF-90D-54	
	RATED CURRENT	7.5A	6A	4.5A	3.75A	3A	2.5A	2.15A	1.88A	1.67A	
OUTPUT	RATED POWER	90W	90W	90W	90W	90W	90W	90.3W	90.24W	90.18W	
	CONSTANT CURRENT REGION	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	CURRENT RIPPLE	5.0% max. @rated current									
	CURRENT TOLERANCE	±5.0%									
	SET UP TIME Note.3	500ms/115VAC, 230VAC									
INPUT	VOLTAGE RANGE Note.2	90 ~ 305VAC 127 ~ 431VDC									
	FREQUENCY RANGE	(Please refer to "STATIC CHARACTERISTIC" section) 47 ~ 63Hz									
	POWER FACTOR (Typ.)	$PF \ge 0.98/115$ VAC, $PF \ge 0.96/230$ VAC, $PF \ge 0.94/277$ VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)									
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≥60%/115VC, 230VAC; @load≥75%/277VAC)									
	EFFICIENCY(Typ.)	88%	89%	90%	90%	89%	90%	90%	90%	90%	
	AC CURRENT (Typ.)	0.95A / 115	VAC 0.5	5A / 230VAC	0.4A / 27	77VAC					
	INRUSH CURRENT(Typ.)	COLD START 60A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410									
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER	3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT	<0.25mA / 277VAC									
	STANDBY POWER CONSUMPTION	<0.5W									
PROTECTION		95 ~ 108%									
	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed									
		15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V	
	OVER VOLTAGE	Shut down	o/p voltage, r	e-power on to	recover						
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover									
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)									
	MAX. CASE TEMP.	Tcase=+85°C									
	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
	SAFETY STANDARDS	UL8750, CSA C22.2 No. 250.13-12, ENEC EN61347-1, EN61347-2-13, EN62384 independent, EAC TP TC 004, IP67 approved ;Design refer to EN60335-1									
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC									
EMC	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH									
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 60%) ; EN61000-3-3;EAC TP TC 020									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level(surge immunity Line-Line 2KV); EAC TP TC 020									
OTHERS	MTBF	916.7K hrs min. Telcordia SR-332 (Bellcore); 231.2K hrs min. MIL-HDBK-217F (25°C)									
	DIMENSION	171*63*37.5mm (L*W*H)									
	PACKING		cs/14.9Kg/0	,							
NOTE	De-rating may be needed at 3. Length of set up time is med. The standby power consurts. The driver is considered as complete installation, the fig. The model certified for CC 7. This series meets the typic or less. Please refer to the warrant.	neters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. g may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. If set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. Individual display power consumption is specified for 230VAC. It is a component that will be operated in combination with final equipment. Since EMC performance will be affected by the installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. It is certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model. Please contact MEAN WELL for details. The sesses meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C effect to the warranty statement on MEAN WELL's website at http://www.meanwell.com point temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude and 2000m(6500ft).									


■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

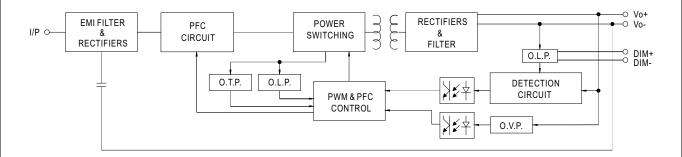

■ DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.




Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




\divideontimes 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC




"DO NOT connect "DIM- to Vo-"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to Vo-"


Applying additive resistance:



"DO NOT connect "DIM- to Vo-"








Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



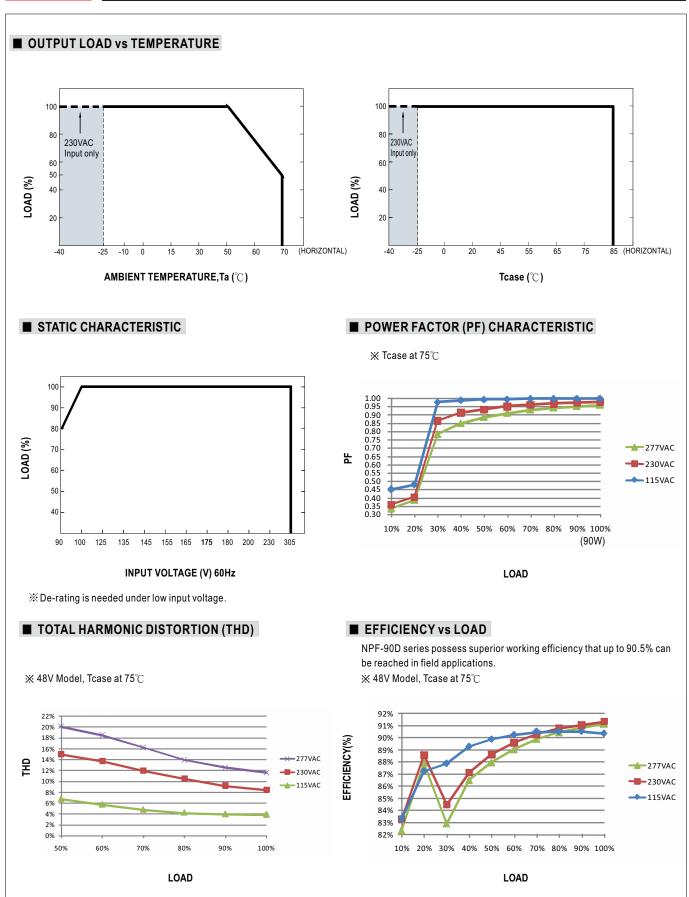



■ LIFE TIME

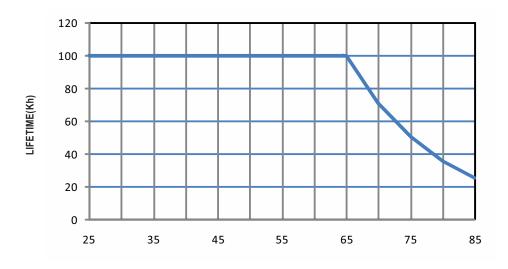


Tcase ($^{\circ}\!\mathbb{C}$)



■ MECHANICAL SPECIFICATION

Case No. PWM-90P

Unit:mm

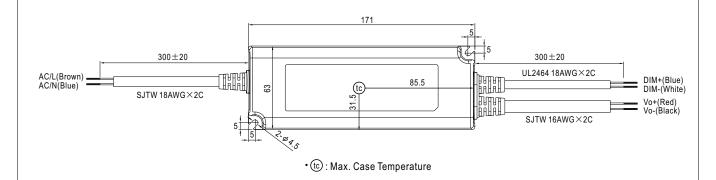



■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html