

















## Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class | design
- · Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- · Function options: output adjustable via potentiometer; 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty


# Applications

- LED street lighting
- LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HLG-120H series is a 120W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-120H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for -40 $^{\circ}$ C ~ +80 $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-120H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# ■ Model Encoding

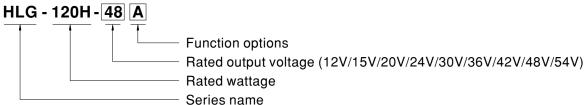

Туре	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request

# 120W Constant Voltage + Constant Current LED Driver


#### **SPECIFICATION**

MODEL		HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V
	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
		Adjustable for	A/AB-Type or	nly (via built-ir	n potentiomete	er)				
ОИТРИТ	VOLTAGE ADJ. RANGE	10.8 ~ 13.5V   13.5 ~ 17V   17 ~ 22V   22 ~ 27V   27 ~ 33V   33 ~ 40V   38 ~ 46V   43 ~ 53V   49 ~ 58V								
		Adjustable for A/AB-Type only (via built-in potentiometer)								
	CURRENT ADJ. RANGE	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2~4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION		±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
		1200ms,50ms		00ms,50ms/2		1 - 5.57				1 - 11777
	HOLD UP TIME (Typ.)	12ms / 115VAC, 230VAC								
	TIOLD OF THE (Typ.)	90 ~ 305VAC 127 ~ 431VDC								
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE									
	TREGUENCTRANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.93/277VAC @ full load								
		(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)								
	TOTAL HARMONIC DISTORTION	THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC)  (Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)								
NPUT	EFFICIENCY (T. )	`			· · · ·		000/	000/	00.50/	00.50/
INFOI	EFFICIENCY (Typ.)		92%	93%	93%	93%	93%	93%	93.5%	93.5%
	AC CURRENT (Typ.)	1.4A / 115VAC			.55A / 277VAC					
	INRUSH CURRENT (Typ.)	COLD START	6UA(twidth=3/5,	µs measured a	t 50% Ipeak) at 2	230VAC; Per NE	-MA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	5 units (circuit breaker of type B) / 9 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.75mA / 277VAC								
	OVER CURRENT	95 ~ 108%								
	OVER CORRENT	Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed								
PROTECTION	0VED VOLT4 05	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V
	OVER VOLTAGE	Shut down o/p	voltage with a	auto-recovery o	or re-power on	to recovery				
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down								
	WORKING TEMP.	Tcase= -40 ~ +	+80°C (Please	e refer to "OU"	TPUT LOAD vs	s TEMPERATU	IRE" section)			
	MAX. CASE TEMP.	Tcase= +80°C					<u>,                                      </u>			
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/C (0~60°C)								
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08, EN/AS/NZS 61347-1, EN/AS/NZS 61347-2-13 independent; GB19510.1,								
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75K	CVAC I/P-FC	G:2KVAC O	/P-FG:1.5KVA	'C				
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC EMISSION Note.8	Compliance to E	EN55015, EN55	032 Class B, E	N61000-3-2 Cla	ass C (@ load≧	50%) ; EN6100	0-3-3,GB17743 a	and GB17625.1,	EAC TP TC
	EMC IMMUNITY	8 Compliance to EN55015, EN55032 Class B, EN61000-3-2 Class C (@ load ≥ 50%); EN61000-3-3, GB17743 and GB17625.1, EAC TP TC 020 Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020								
	MTBF	559.5K hrs min. Telcordia SR-332 (Bellcore); 167.1Khrs min. MIL-HDBK-217F (25°C)								
OTHERS	DIMENSION	220*68*38.8mm (L*W*H)								
	PACKING	1.12Kg; 12pcs/		JFT						
					out, rated curre	ent and 25°C o	f ambient tem	perature.		
NOTE	2. Ripple & noise are measure	ially mentioned are measured at 230VAC input, rated current and $25^{\circ}$ C of ambient temperature.  Ired at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  p tolerance, line regulation and load regulation.								

- 3. Tolerance: includes set up tolerance, line regulation and load regulation
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).


## ■ BLOCK DIAGRAM

Fosc: 100KHz

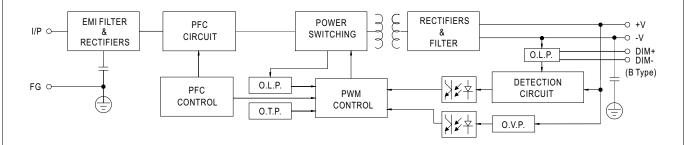

## ■ DRIVING METHODS OF LED MODULE

\*\* This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

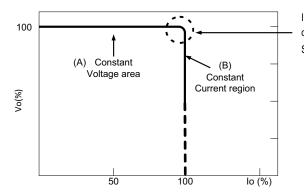

Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.


# 120W Constant Voltage + Constant Current LED Driver

## ■ DIMMING OPERATION




#### **※** 3 in 1 dimming function (for B/AB-Type)

- · Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

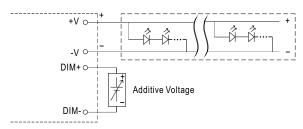


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

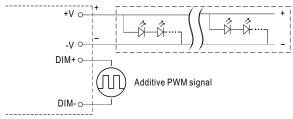



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

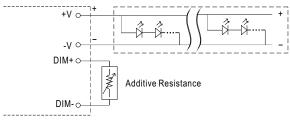


"DO NOT connect "DIM- to -V"








Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

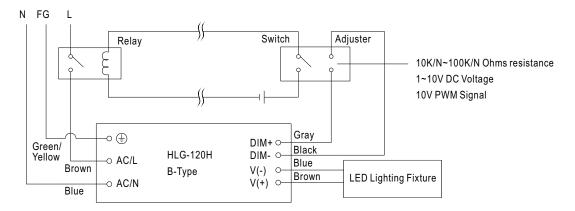


Using a switch and relay can turn ON/OFF the lighting fixture.



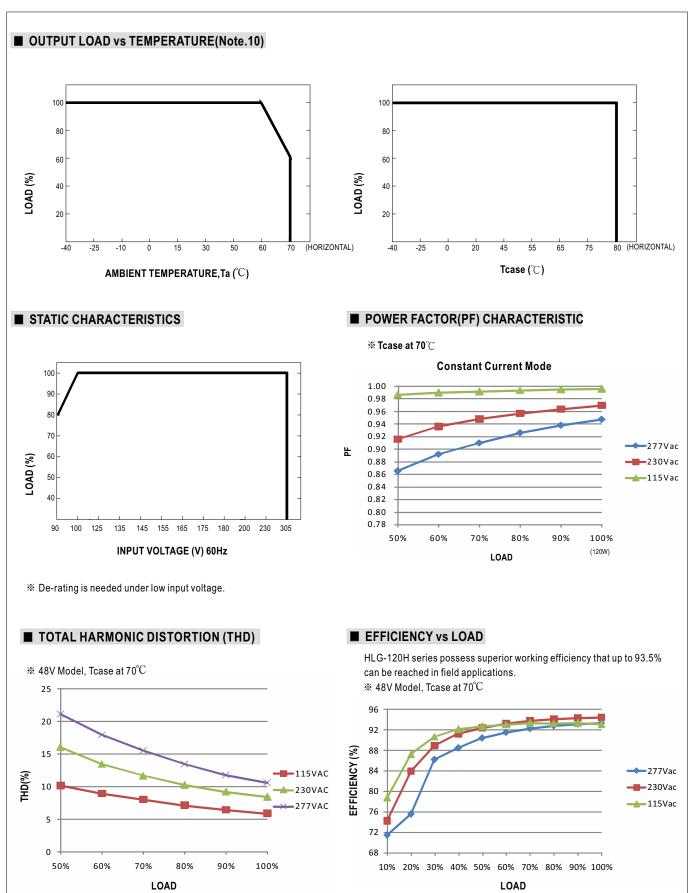





# ■ LIFE TIME

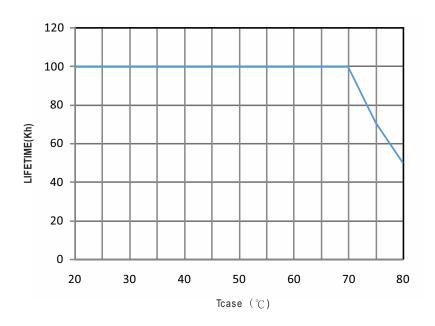



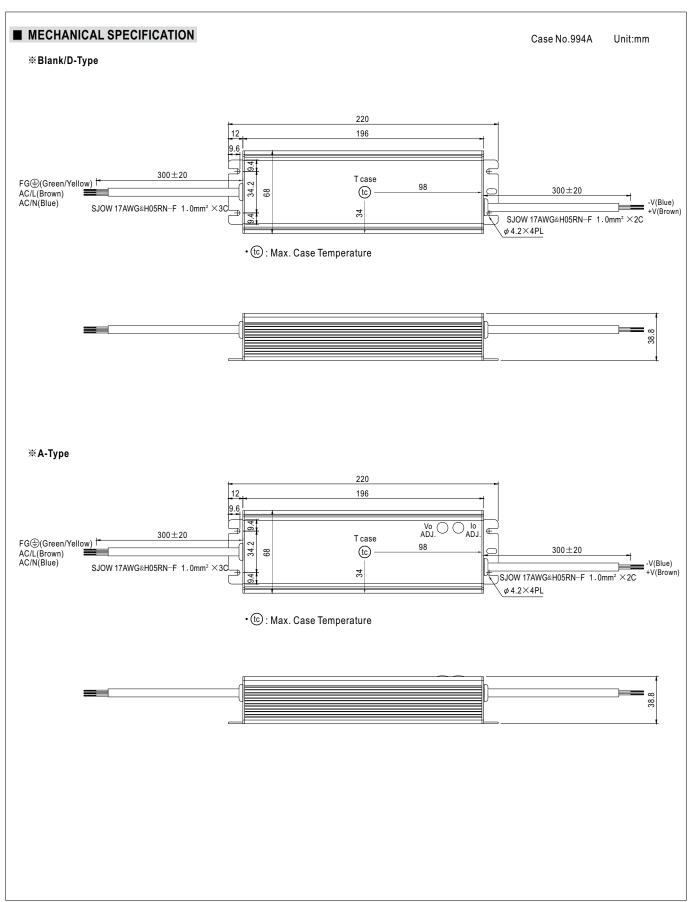



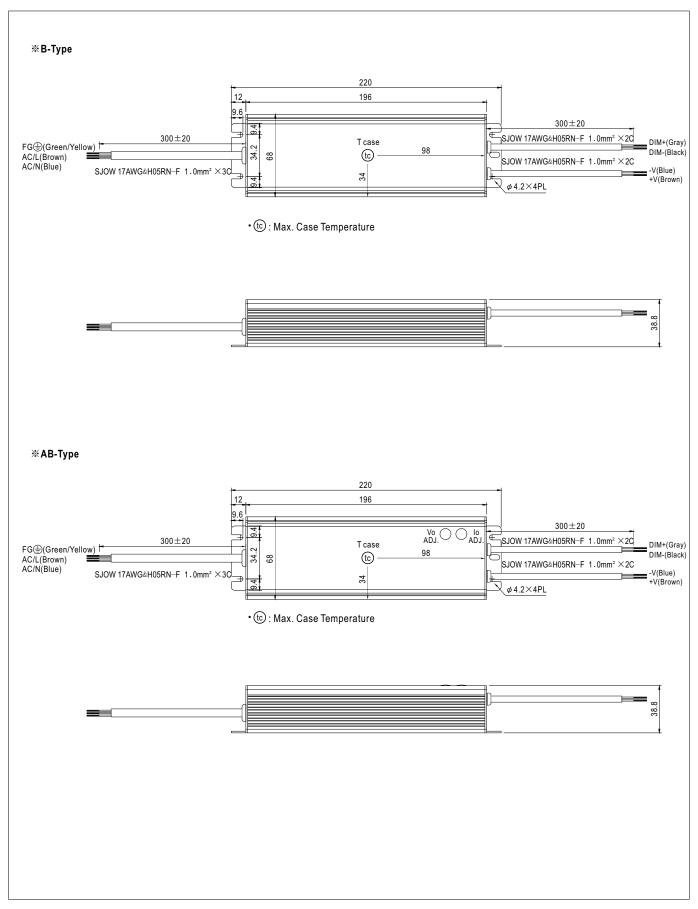




## ■ WATERPROOF CONNECTION


#### **\* Waterproof connector**

 $Water proof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-120H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$ 




Size	Pin Configuration (Female)			
M12	000	000		
IVITZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	·		
IVITS	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		




#### **X** Cable Joiner

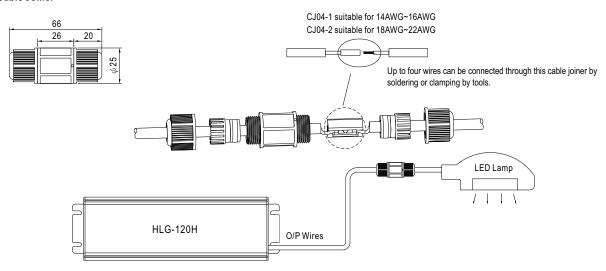

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

#### **\* Junction Box Option**

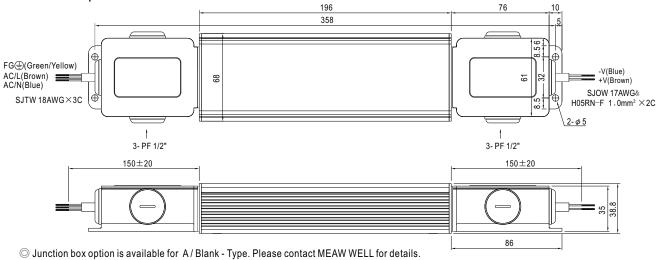

#### ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/manual.html